

Illustrative render generated from published specifications

18.35 × 70.05 mm
49.1 g

Epoch PROTECTED



Live page & updates


Epoch

- 18650
- NMC
- MOOCH-TESTED · 8 A

3,500 mAh CAPACITY	8 A MOOCH CONTINUOUS	3.6 V NOMINAL · 2.5 – 4.2 V	12.6 Wh ENERGY · 256.62 WH/KG
--	--	---	---

REFERENCE ONLY — NOT AN OFFICIAL DOCUMENT

This information is gathered from multiple sources, including manufacturer datasheets, independent third-party testing, and community contributions. Cell specifications vary between production batches and change over time, and no figure here is guaranteed to be correct or current. **Always consult the manufacturer's spec sheet directly.** Use this sheet for reference only — never as the sole basis for a safety-critical decision about charging, discharging, or assembling cells. The cell image is an illustrative render generated from published specifications, not a photograph.

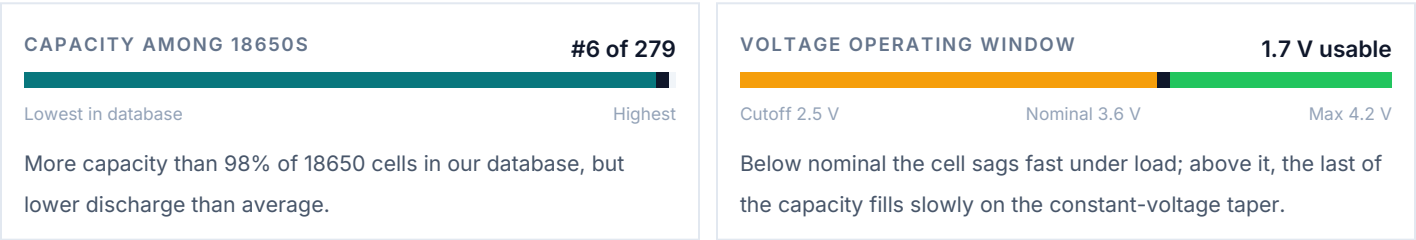

APPLICATION SUITABILITY

Rule-of-thumb ratings from this cell's capacity and continuous discharge. Check your own load before committing.

Powerwalls	High capacity means more stored energy per cell. Fewer cells needed for a given kWh target.
Ebike packs	Marginal. Check your motor's peak draw first. You might get voltage sag under load.
Car audio	Not enough discharge for car audio amplifiers. You need at least 15-20A continuous for most setups.
High-drain vaping	Below the 25A Mooch CDR threshold that high-drain vaping needs. Use a higher-drain cell.
Flashlights	High capacity means long runtime. Great for everyday carry and extended use.
Power tools	Not enough discharge or capacity for power tool use.

IDENTITY

Manufacturer	Epoch
Model	PROTECTED
Format	18650
Chemistry	NMC
Wrap colour	■ Black
Terminal	Button top
Protection	Protected

OPERATING TEMPERATURE

Charging	10°C to 45°C
Discharging	-20°C to 60°C

ENERGY & POWER DENSITY

Energy	12.6 Wh
Specific energy	256.62 Wh/kg
Volumetric density	680.14 Wh/L
Power density (mass)	587 W/kg
Power density (volume)	1,555 W/L
Capacity ranking	#6 of 279 18650s

PHYSICAL

Diameter	18.35 mm
Length	70.05 mm
Weight	49.1 g

ELECTRICAL

Rated capacity	3,500 mAh
Nominal voltage	3.6 V
Max charge voltage	4.2 V
Discharge cutoff	2.5 V
Energy	12.6 Wh
Max continuous discharge	8 A (mooch)
Discharge C-rate	2.3C
Standard charge current	1,475 mA
Typical charge time	2.4 h

C-RATE CONVERSION · 3,500 MAH

C-RATE	CURRENT	THEORETICAL RUNTIME
0.2C	0.7 A	5h 00m
0.5C	1.75 A	2h 00m
1C	3.5 A	1h 00m
2C	7 A	30m

Highlighted row is closest to the rated 8 A continuous discharge.

CHARGING

RATE	CURRENT	ESTIMATED TIME TO FULL
------	---------	------------------------

Standard	1,475 mA	~2h 22m
0.5C	1,750 mA	~2h 00m
1C	3,500 mA	~1h 00m

Constant-current phase only. Real charge time runs longer because of the constant-voltage taper at the end.

SERIES PACK CONFIGURATIONS

Voltages calculated from this cell's own nominal and maximum charge voltage. The 3P columns show one common parallel count as a worked example — scale the parallel group to the capacity you need.

SERIES	NOMINAL	FULLY CHARGED	CELLS AT 3P	CAPACITY	ENERGY
3S	10.8 V	12.6 V	9	10.5 Ah	113 Wh
7S	25.2 V	29.4 V	21	10.5 Ah	265 Wh
10S	36 V	42 V	30	10.5 Ah	378 Wh
13S	46.8 V	54.6 V	39	10.5 Ah	491 Wh
14S	50.4 V	58.8 V	42	10.5 Ah	529 Wh

EXAMPLE PACKS

7S2P 24V ebike / small pack 14 cells · 25.2 V 7,000 mAh · 176 Wh 16 A max · ≈0.69 kg cells	13S4P 48V ebike standard 52 cells · 46.8 V 14,000 mAh · 655 Wh 32 A max · ≈2.55 kg cells	16S4P DIY powerwall 64 cells · 57.6 V 14,000 mAh · 806 Wh 32 A max · ≈3.14 kg cells	4S6P Power tool replacement 24 cells · 14.4 V 21,000 mAh · 302 Wh 48 A max · ≈1.18 kg cells
---	---	--	--

SIMILAR CELLS

Same format and chemistry, within ±500 mAh.

CELL	MAH	CONTINUOUS	WH	WEIGHT	WH/KG
Epoch PROTECTED (this cell)	3,500	8 A	12.6	49.1 g	257
Amprius INR18650/40	4,000	12 A	14.4	48 g	300
Vapcell N40	4,000	10 A	14.4	48 g	300
Vapcell F38	3,800	10 A	13.7	48 g	285
Vapcell N36	3,650	8 A	13.1	48 g	274
LG LGEBMJ11865	3,500	10 A	12.7	49 g	260

HANDLING & SAFETY

- Never charge above 4.2V or discharge below 2.5V.
- Store cells at around 3.6-3.8V (roughly 40-60% charge) for long-term storage.
- Don't mix cells with different capacities, chemistries, or states of charge in a pack.
- Inspect wraps before use. A torn wrap can cause a short circuit.
- Always use a BMS or balance charger appropriate for your pack configuration.
- Keep cells away from metal objects, keys, and coins. A short across the terminals can cause fire.

SOURCES & FURTHER READING

Cell Saviors page	cellsaviors.com/cell-database/epoch-protected
Independent test (Mooch)	https://www.e-cigarette-forum.com/threads/bench-test-results-e...
Full cell database	cellsaviors.com/cell-database